

ACF-400

ac codiergeräte



Continuous Motion Offline Carton Coder



Features:

- ◆ *Marks chipboard cartons, crash lock cartons, card stock, and other packaging*
- ◆ *Touch screen operator interface*
- ◆ *Quick product changeover*
- ◆ *Compact and mobile*
- ◆ *Refillable during operation*
- ◆ *Feed out magazine option available in many different versions*

Specifications

Dimensions

Height	65.3 Inches (1660 mm)
Width	27.5 Inches (700 mm)
Depth	61 Inches (1550 mm)
Weight	287 lbs, 130 kg (without printing system)

Electrical Standard

110/230VAC, 50/60 Hz, 500 Watts maximum

Operation LCD Touch Screen Panel

Languages English, German, (others on request)

Environment 10°C to 50° C (10°C - + 70° C with storage only)
Relative air humidity 10 - 75%, no condensation (with operation and storage)

Material

Stainless steel, anodized aluminum

Size of cardboards (L x W)

2" x 2", 50 mm x 50 mm minimum
11.81" x 15.75", 300 mm x 400 mm maximum

Material Thickness: .5 to 5 mm

Printing Capacity

Depending on material, up to 600 cartons/minute

Product Speed


1-50 m / min. (depending on printing system)

Printing Technologies to Choose

Thermal Transfer Printing Systems

NGT-Print Head	NGT2		NGT4	
Print area (W,L) intermittent	2.1" x 2"	53 x 50 mm	4.2" x 3.5"	107 x 90 mm
Print area (W,L) continuous	2.1" x 39.4"	53 x 1000 mm	4.2" x 39.4"	107 x 1000 mm
Thermal bar (corner edge)	2.1"	53 mm	4.2"	107 mm

NGT Print Head	NGT6		NGT8	
Print area (W,L) intermittent	6.3" x 3.9"	160 x 100 mm	8.4" x 3.9"	213 x 100 mm
Print area (W,L) continuous	6.3" x 39.4"	160 x 1000 mm	8.4" x 19.7"	213 x 500 mm
Thermal bar (corner edge)	6.3"	160 mm	8.4"	213 mm

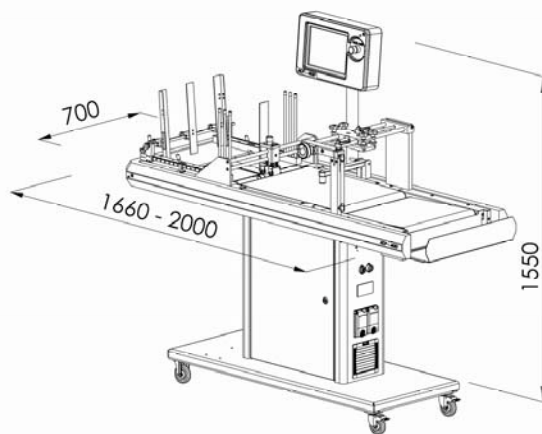

Compact Size



ACF-400 with the NGT4

Distributed by:



Norwood Marking Systems, A Division of ITW

2538 Wisconsin Avenue
Downers Grove, IL 60515
www.itwnorwood.com

Phone: (630) 968-0646
Toll Free: (800) 626-3464
Fax: (630) 968-7672